
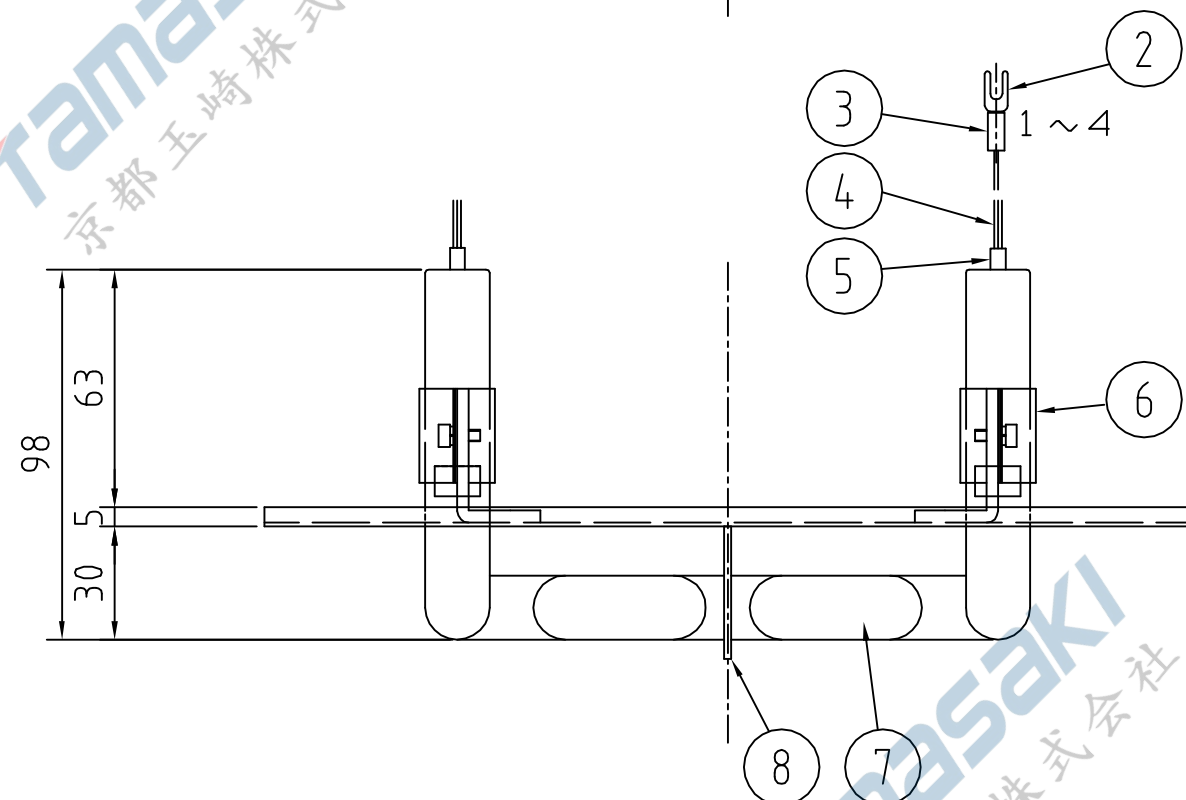


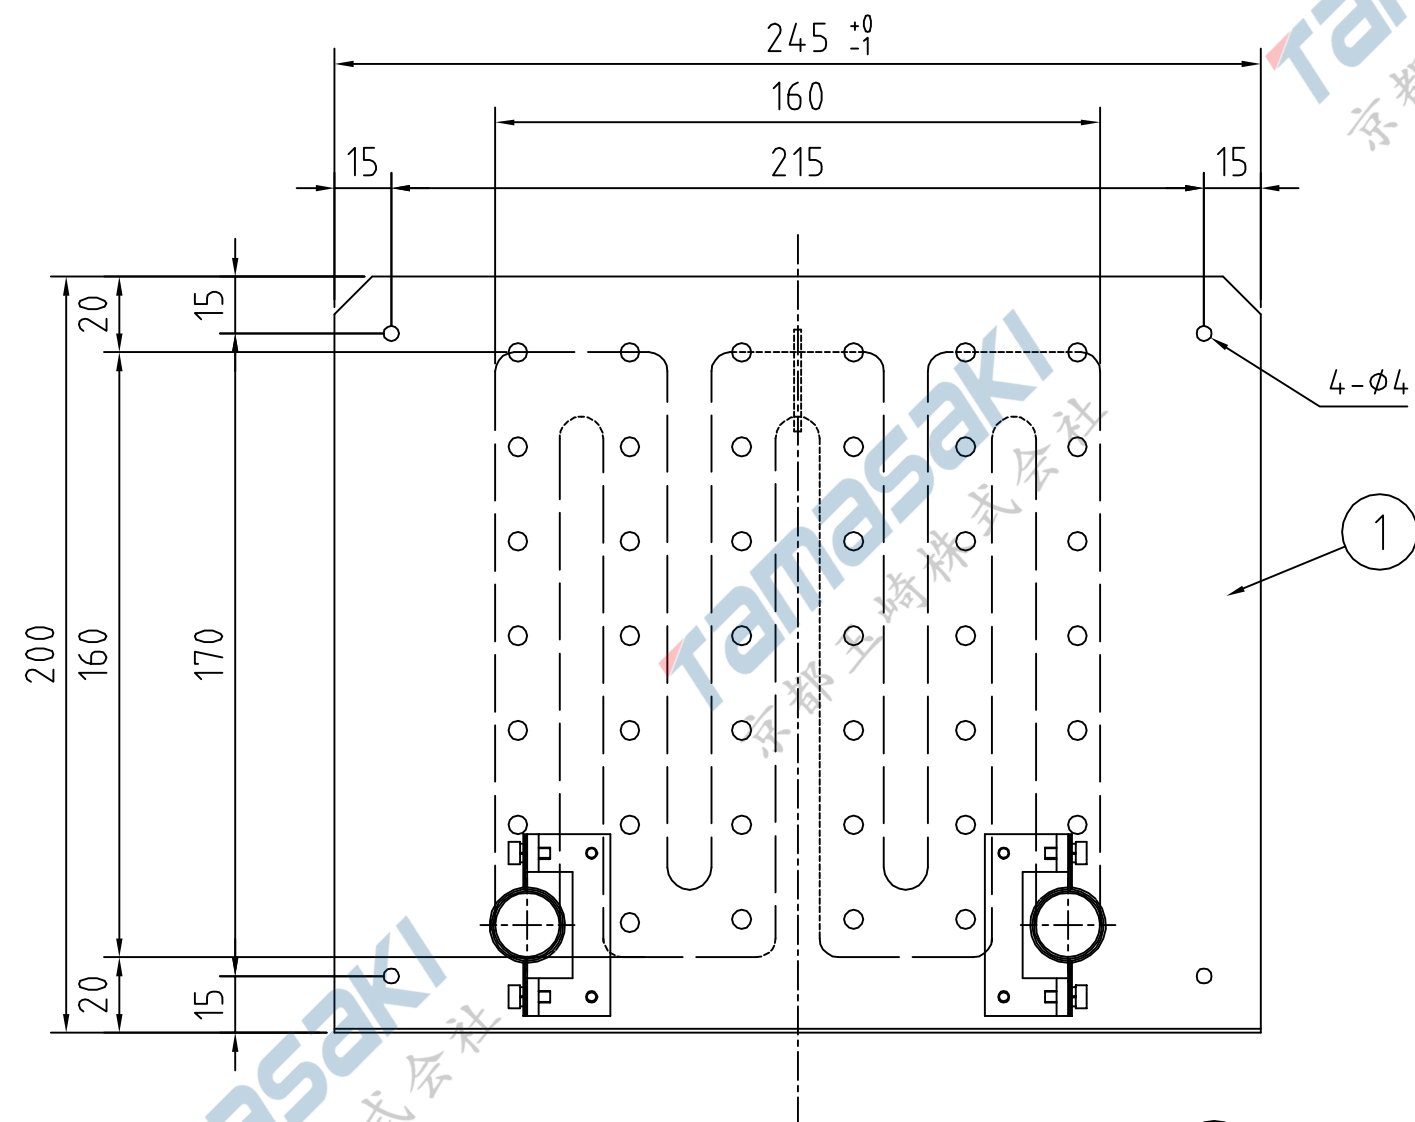

REV	DESCRIPTION	DATE	PREP	APPD
-----	-------------	------	------	------

SPECIFICATIONS

LAMP WATTAGE	110 (W)
LAMP CURRENT	0.8 (A)
LAMP VOLTAGE	(160) (V)
ARC LENGTH	1060 (mm)

8	1	LAMP HOLDER	SUS			
7	1	BULB	Synthetic fused quartz			
6	4	LAMP HOLDER	Alminum	Anodized alminum		
5	2	GUARD TUBE	TEFLON			
4	4	CORD	Teflon	0.5sq× 200mm		
3	4	CORD NUMBER	VINYL RESIN	1,2,3,4		
2	4	Y- SHAPED TERMINAL	1.25YAS-3			
1	1	REFLECTER	Alminum	Anodized alminum		
REF No,	QUTY	DESCRIPTION	MATERIAL	REMARKS		
FILE		APP	CHECK	DSG	TITLE	
SUV110GS-36L英語外觀					LP HG LAMP	
TOLERANCES JIS B0405 GRADE v	over 3 to 6	±0.5	Oct 19,09	Oct 19,09	Oct 19,09	MODEL SUV110GS-36L
	over 6 to 30	±1				
	over 30 to 120	±1.5	ISIGURO	ISIGURO	MORI	SCALE 1:2
	over 120 to 400	±2.5				
	over 400 to 1000	±4	SEN LIGHTS CORPORATION	DWG No, 2 - 0 7 8 1 3 A		
	over 1000 to 2000	±6				
	over 2000 to 4000	±8				
REV A 3						